

VLI-725-IRB

COLOR IR LED CAMERA




- › HIGH RESOLUTION (50, 24LEDs)
- › 700TV Line(NTSC/PAL)
- › Minimum Illumination : 0.005Lux (F:1.2)
- › Automatic Gain Control
- › SONY 960H EXVIEW II SUPER HAD CCD
- › Auto White Balance
- › 3.6mm Fixed Lens
- › 25 IR LEDs WITH 20mt. Range

Technical Specifications

	NTSC	PAL
Image Device	1/3" SONY 960H EXVIEW II SUPER HAD CCD	
Picture Elements	1020(H)× 508(V)	1020(H)× 596(V)
Scanning System	525 Lines, 2:1 Interlace	625 Lines, 2:1 Interlace
Sync System	Internal Synchronization	
Horizontal Resolution	700 TV Line	
Video Output	1Vp-p 75Ω	
S/N Ratio	More Than 52dB (AGC Off)	
Gamma Characteristic	0.45	
Gain Control	AUTO	
White Balance	Auto 2300K ~ 9500K	
Electronic Shutter	1/60~1/100,000sec (Auto)	1/50~1/100,000sec (Auto)
LENS	3.6mm Fixed Lens	
Smear Effect	0.005%	
Minimum Illumination	0.005Lux (F:1.2)	
Power Consumption	12V DC(6.5V~28V), 350mA (IR ON)	
Operation Temperature	-10° ~+50° , RH95% Max (14F~122°F)	
Storage Temperature	20° ~+60° , RH95% Max	
Weight	Approx 380 g	
Housing	ALUMINUM	
Dimension(mm)	50Φ, 24LEDs	
Cable(option)	Standard 1200mm BNC/DC Jack	

Dimensions (mm)

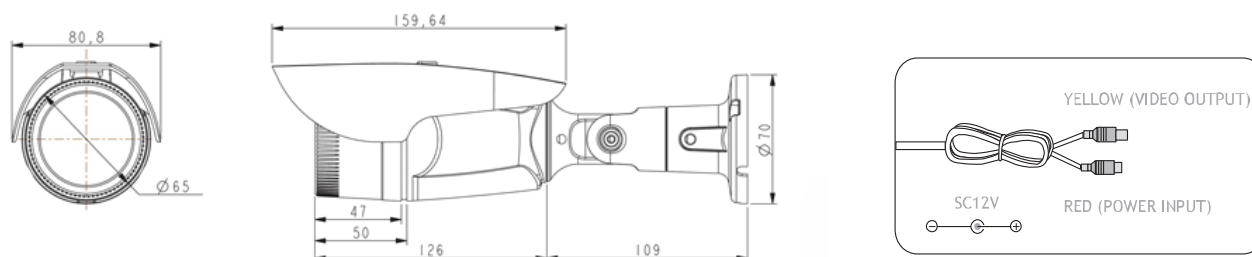

Instructions

- › Do not door or strike this equipment. Sensitive electronics inside are vulnerable to excessive shock.
- › Do not install the equipment near any naked flames or heat sources. Excessive heat could damage this unit.
- › Do not cover cloth or to install this unit in poorly ventilated places. This may lead to overheating.
- › Do not continue to operate if there appears to be fault. If the unit ceases to function, contact qualified service personnel for help.
- › Do not touch the power connection with wet hands. Risk of short circuit or electric shock.
- › Do not damage the power cord or leave it under pressure. Risk of fire or shock circuit.

VISILEX

Visilex Technologies

Baererstr- 22A, Hamburg, 21073, Germany

☎ +49 176 72643084 ✉ sales@visilex.com

Design and specifications are subject to change without notice
© 2014 Visilex Technologies